

GV-IP Decoder Box Mini




HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE



TV-Out Solution for IP cameras (ONVIF, RTSP)

Introduction

GV-IP Decoder Box Mini can decode and display one IP channel in an HDMI monitor. It supports third-party IP cameras that adhere to RTSP or ONVIF, and it can detect any ONVIF-compliant cameras on the same LAN. The security administrator can monitor the channel, take snapshots of critical moments, and pause it when events occur. GV-Joystick V2 can be installed to control any PTZ or Speed Dome camera connected to the GV-IP Decoder Box Mini.

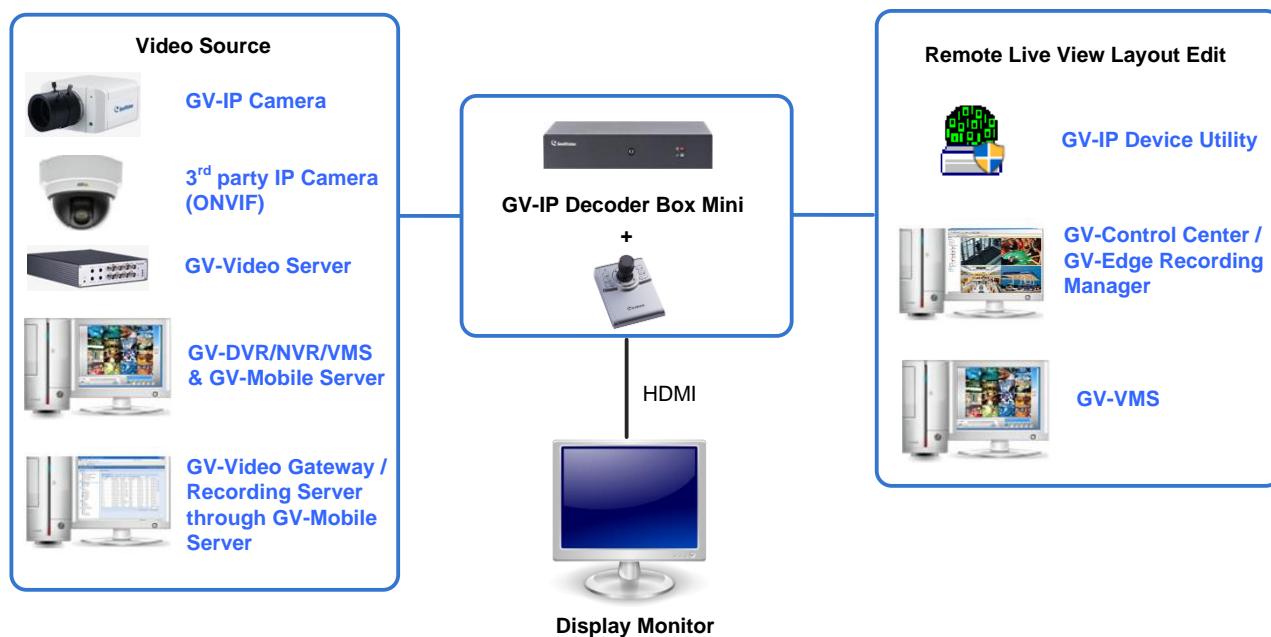

Features

- Decode one IP channel
- Decode video streams in H.264 / H.265 codec up to 60 fps
- Decode up to 8 MP resolution
- Auto-search for ONVIF IP devices
- Support for third-party IP cameras that adhere to RTSP or ONVIF
- Display of Matrix view through GV-Mobile Server
- Support for 10/100 Ethernet over LAN
- DC 12V / PoE (IEEE 802.3af)
- HDMI output display
- User interface controls using GV-IR Remote Control
- PTZ or Speed Dome camera control using GV-Joystick V2
- USB drive for snapshot storage and firmware upgrade
- Support for camera and layout assignment remotely from GV-VMS, GV-Control Center, and GV-Edge Recording Manager
- Support for 10 languages

Specifications

Video		
Video Codec		H.264, H.265
Audio Codec		G.711
Maximum Resolution	1-ch Division	3840 x 2160: up to 30 fps 1280 x 720, 1920 x 1080: up to 60 fps
Video Output	HDMI	3840 x 2160 / 1920 x 1080 / 1280 x 720
Network		
Interface		10/100 Ethernet
Protocol		ONVIF, RTSP, TCP
Mechanical		
Connector	Power Adapter	12V DC Jack
	Ethernet	RJ-45
	Monitor Output	HDMI x 1
	USB 2.0	USB slot x 1 (2.0 backward compatible, FAT32 format)
General		
Operating Temperature		0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity		20% ~ 80% (with no condensation)
Weather Resistance		Indoor use only
Dimensions (W x H x D)		126.8 x 92.9 x 26.6 mm (5.0" x 3.7" x 1.0")
Net Weight		312 g (0.69 lb)
Power		DC 12V / PoE (IEEE 802.3af)
Power Consumption		36 W (max. 3 A at 12V DC)
Language		English / French / German / Italian / Japanese / Polish / Portuguese / Russian / Spanish / Traditional Chinese
Applications		
Software Supported		GV-VMS (V17.4.8 / V18.3.3 or later), GV-Edge Recording Manager (Windows Version, V2.3.0 or later), GV-Control Center (V4.2.1 or later)

Note:


1. The device can only accept one power source, either a PoE power supply or a DC power adapter. Connecting two power sources simultaneously can damage the device.
2. Support for camera and layout assignment remotely from GV-Software is only available for GV-VMS V17.4.8 / 18.3.3, GV-Control Center V4.2.1, GV-Edge Recording Manager V2.3.0 or later versions.
3. Up to 64 cameras can be looped on one screen division when GV-IP Decoder Box Mini is added to GV-VMS / GV-Control Center / GV-Edge Recording Manager.
4. Specifications are subject to change without notice.

Compatible Devices

1. GV-IP Camera and GV-Video Server
2. Third-party IP devices supporting H.264 / H.265 and adhering to RTSP or ONVIF
3. GV-Mobile Server
4. HD DVR: UA-XVR and UA-XVL models

To decode and display non-H.264 / H.265 IP channels or GV-FER12203 / 12700, connect the devices to GV-NVR / VMS and access them through GV-Mobile Server.

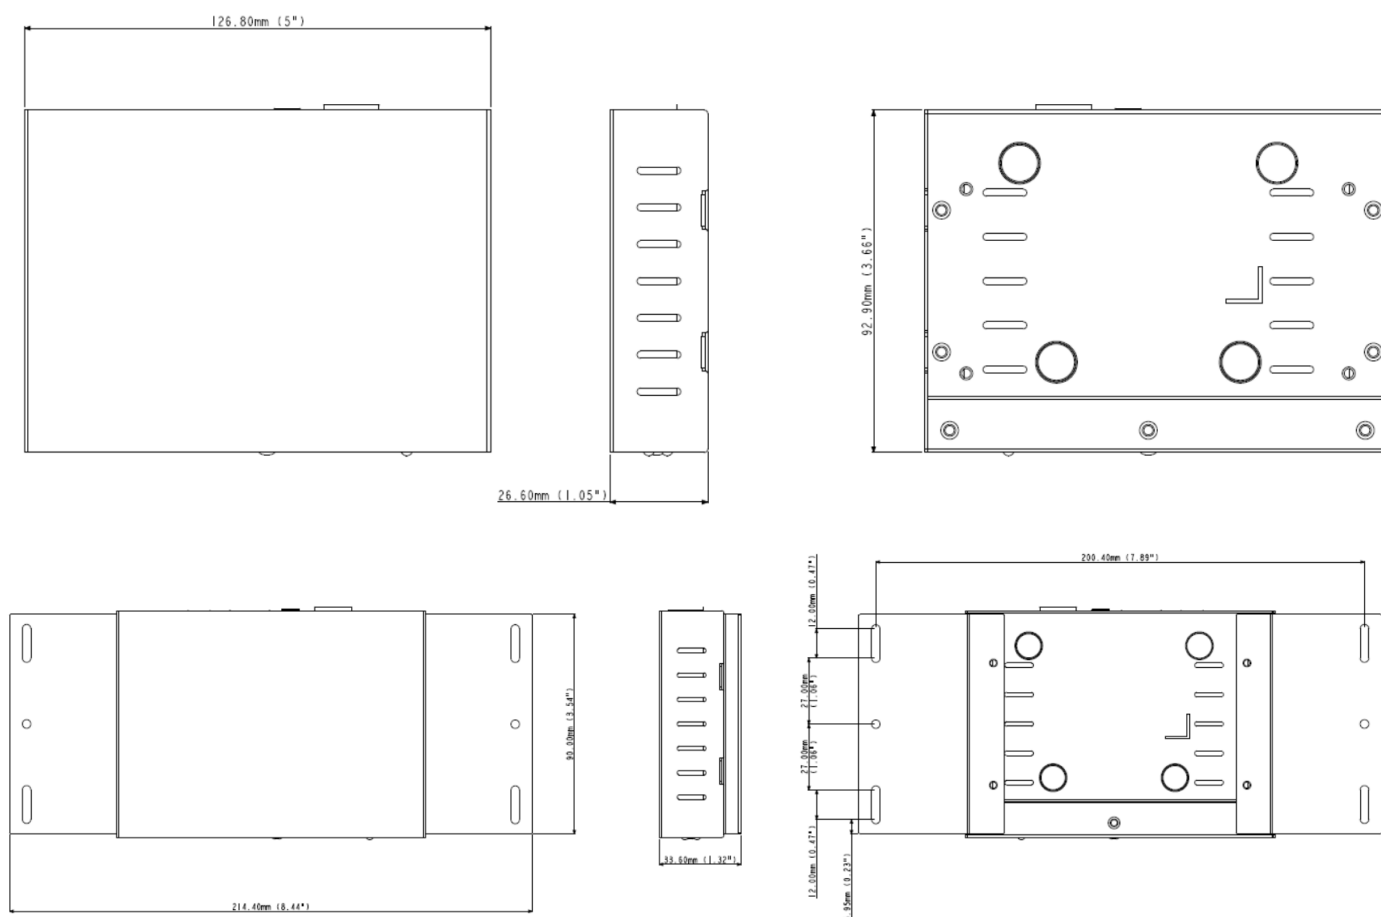


Dimensions



Overview



Accessories

Name	Details
GV-Joystick V2 	GV-Joystick V2 facilitates focusing, zooming, panning, tilting of GeoVision and third-party PTZ or Speed Dome cameras connected on GV-IP Decoder Box.
GV-POE Switch	GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.
HDMI Cable 	Use the HDMI cable to connect GV-IP Decoder Box with an HDMI monitor for high-quality image display. Length: 150 cm (4.92 ft) Version: 1.4a
Power Adapter	Contact our sales representatives for the countries and areas supported.
Wall Mount Kit 	Use the Wall Mount Kit to install GV-IP Decoder Box on wall.

Packing List

- GV-IP Decoder Box Mini
- GV-IR Remote Control
- Download Guide
- Warranty Card