

GV-TBL8804 AI 8MP H.265 Super Low Lux WDR Pro Full Color Warm LED IR

Bullet IP Camera



- AI deep learning: AI Perimeter Protection & Classification (Human, Vehicle)
- 1/2.7" progressive scan super low lux CMOS sensor
- Triple streams from H.265, H.264 or MJPEG
- Wide Dynamic Range Pro (WDR Pro)
- Min. illumination at 0.01 lux
- Up to 20 fps at 3840 x 2160
- Intelligent IR
- Day and night function (with removable IR-cut filter)
- Active Deterrence: alarm sound and warm LED light triggered on AI detection events
- IR distance up to 30 m (100 ft)
- Ingress protection (IP67)
- Built-in micro SD card slot (SD / SDHC / SDXC / UHS-I, Class 10) for local storage
- Built-in microphone and speaker
- Two-way audio
- DC 12V / PoE (IEEE 802.3af)
- ONVIF (Profile S, G, T, M) conformant

Introduction


The Bullet IP Camera is an outdoor, network camera equipped with an automatic IR-cut filter, one IR LED, and two warm LEDs for day and night surveillance. The camera supports H.265 video codec to achieve a better compression ratio while maintaining high-quality pictures at reduced network bandwidths. GV-TBL8804 adheres to the IP67 standard and can be powered through PoE.

GV-TBL8804 is a camera for active deterrence. By using built-in warm LEDs and alarm sounds, it can deter intruders and prevent potential crime.

Empowered by deep learning algorithms, its AI technology distinguishes humans and vehicles from other moving objects. Integrated with GeoVision Video Management Software (VMS), it supports AI perimeter protection, real-time alerts, events playback, and more.


Deep Learning Function

Face Detection

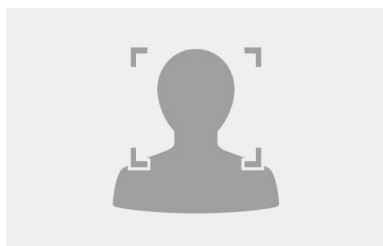


AI Perimeter Protection


(Intrusion, Crossing Line
Entering Area, Leaving Area)

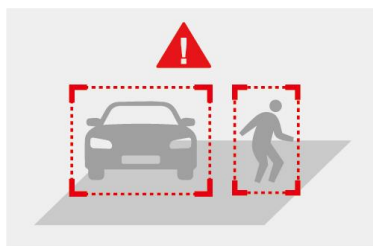

People Flow Counting

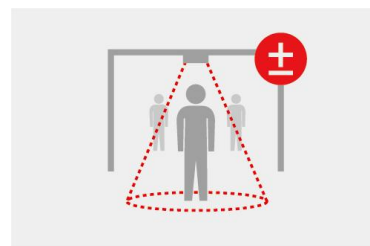

Dimensions

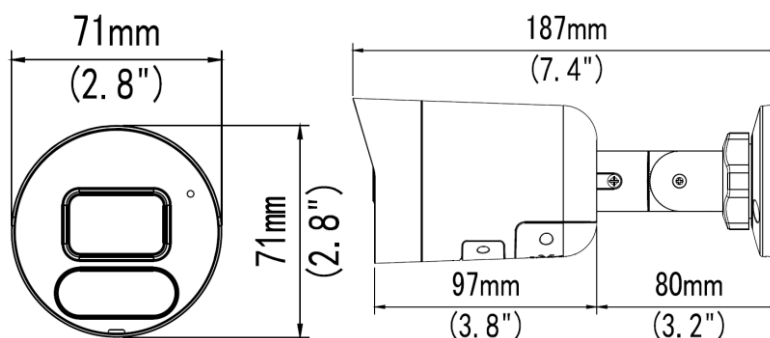

Specifications

Camera					
Image Sensor		1/2.7" progressive scan super low lux CMOS			
Picture Elements		3840 (H) x 2160 (V)			
Minimum Illumination	Color	0.01 Lux (F2.0, AGC ON)			
	IR ON	0 Lux			
Shutter Speed		Auto / Manual (1 ~ 1/100000 sec)			
White Balance		Auto / Manual			
Gain Control		Auto / Manual			
S/N Ratio		56 dB			
WDR Pro		Yes			
Dynamic Range		Up to 120 dB			
Lens					
Megapixel		8 MP			
Day / Night		Yes (with removable IR-cut filter)			
Lens Type		Fixed			
Focal Length		4 mm			
Maximum Aperture		F/2.0			
Mount		M12			
FOV	Horizontal	86°			
	Vertical	44.1°			
	Diagonal	112.5°			
Operation	Focus	Fixed			
	Zoom				
	Iris				
IR LED Quantity		1 IR LED			
Max. IR Distance		30 m (100 ft)			
Warm LED Quantity		2 warm LEDs			
Max. Warm LED Light Distance		20 m (65 ft)			
DORI		Detect	Observe	Recognize	Identify
Lens	4 mm	120 m (383.7 ft)	48 m (157.5 ft)	24 m (78.7 ft)	12 m (39.4 ft)
Operation					
Video Compression		H.265, H.264, MJPEG			
Video Streaming		Triple streams from H.265, H.264 or MJPEG			
Video Resolution	Main Stream	3840 x 2160 (Default), 2944 x 1656, 2560 x 1440, 1920 x 1080			
	Sub Stream	1280 x 720, 704 x 576, 704 x 288, 640 x 360 (Default), 352 x 288			
	Third Stream (Closed by Default)	704 x 576, 704 x 288, 640 x 360, 352 x 288			
Frame Rate		20 fps at 3840 x2160, 25 fps at 2944 x 1656 / 2560 x 1440, 30 fps at 1920 x 1080 (60 / 50 Hz) *The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).			
Maximum Throughput		40 Mbps			

Maximum Streams *When the total bitrate is within the maximum throughput		20
Video Analytics		Motion Detection, Tampering Alarm, Audio Detection *Tampering Alarm, Audio Detection are only accessible through the camera’s Web interface, which can be used to trigger alerts such as e-mail and FTP
Image Setting		Brightness, Contrast, Saturation, Sharpness, Flicker-less, Image Orientation (Flip, Mirror, 0°, 90°, 180°, 270°-including Corridor format)
Audio Compression		G.711
Audio Support		Two-way Audio (built-in microphone and speaker)
Deep Learning Function		
AI Analytics		- <u>Perimeter Protection</u> (Human & Vehicle classification): Cross Line, Enter Area, Leave Area, Intrusion - <u>Face Detection</u>, <u>People Flow Counting</u>, <u>Crowd Density Monitoring</u> *All Perimeter Protection rules can be enabled together. However, due to hardware resource limitations, only one AI function can be enabled at a time: Perimeter Protection, Face Detection, People Flow Counting, or Crowd Density Monitoring.
Network		
Interface		10/100 Ethernet
Protocol		802.1X authentication (EAP-TLS, EAP-MD5), ARP, DHCP, DDNS, DNS, DynDNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, RTCP, RTP, RTSP, SMTP, SNMP, TCP, UDP, UPnP, ONVIF (Profile S, G, T, M)
Mechanical		
Temperature Detector		No
Camera Angle Adjustment	Pan	0° ~ 360°
	Tilt	0° ~ 90°
	Rotate	0° ~ 360°
Connectors	Power	DC Jack (DC 12 V, 1.25 A), PoE
	Ethernet	RJ-45 connector
	Audio	Two-way (built-in microphone and speaker)
	Local Storage	microSD card slot (SD / SDHC / SDXC), up to 512 GB
General		
Operating Temperature		-30°C ~ 60°C (-22°F ~ 140°F)
Humidity		0 ~ 95% (no condensation)
Power Source		12 V DC / PoE (IEEE802.3af)
Max. Power Consumption		10.5 W
Dimensions		187 × 71 × 71 mm (7.4” × 2.8” × 2.8”)
Weight		0.41 kg (0.99 lb)
Ingress Protection		IP67
Certification		CE, FCC, RoHS, UL compliant
Web Interface		
Installation Management		Web-based configuration
Maintenance		Firmware upgrade through Web Browser or GV-IP Device Utility
Access from Web Browser		Live View, Video Recording, Change Video Quality, Bandwidth Control, Image Snapshot, Defog, Text Overlay, Image Masking
Language		Chinese Traditional, Czech, English, French, German, Italian, Russian
Software Application		
Software Supported		GV-VMS (V17.4.1 / V18.2.1), GV-DVR / NVR (V8.9.1), GV-Control Center (V3.8.0), GV-Recording Server / Video Gateway (V2.0.0), GV-Edge Recording Manager Win version (V2.0.0), GV-Redundant / Failover Server (V1.2.0)
Smart Device Access		GV-Eye for iOS and Android
Live Viewing		Browser (IE, Edge, Chrome, Firefox), Mobile App

Note:

1. The patch files are required for some of the supported software.
2. Do not use clothes or any ordinary material to clean the camera cover since they may result in scratches.
3. Specifications are subject to change without notice.



Packing List

1. GV-TBL8804 IR Bullet IP Camera
2. Waterproof Rubber Set
3. Screw Kit
4. Drill Template Paster
5. Download Guide

Accessories

Model No.	Name		Details
GV-Mount300-2 (must be used with GV-Mount504)	Convex Corner Mount		Dimensions: 137 x 233 x 160 mm (5.4" x 9.17" x 6.3") Weight: 1.65 kg (3.64 lb)
GV-Mount310-2 (must be used with GV-Mount504)	Concave Corner Mount		Dimensions: 111.2 x 369.9 x 210 mm (2.6" x 11.4" x 6.6") Weight: 1.65 kg (3.64 lb)
GV-Mount440 (must be used with GV-Mount504)	Pole Mount		Dimensions: 127 x 136 x 62.5 mm (5" x 5.35" x 2.46") Weight: 0.34 kg (0.75lb) Steel Strap Diameter: Ø 67 ~ 127 mm (Ø 2.6" ~ 5")
GV-Mount440-1 (must be used with GV-Mount504)	Pole Mount Bracket		Dimensions: 136 x 127 x 63.6 mm (5.4" x 5.0" x 2.5") Weight: 0.34 kg (0.75 lb) Steel Strap Diameter: Ø 67 ~ 127 mm (Ø 2.6" ~ 5")
GV-Mount504	Wall Mount Bracket		Dimensions: Ø 104.4 x 54.5 mm (Ø 4.11" x 2.15") Weight: 0.36 kg (0.79 lb)
GV-PA191	PoE Adapter		GV-PA191 is a Power over Ethernet (PoE) adapter designed to provide power to the IP device through a single Ethernet cable.
GV-PA301	Gigabit PoE Adapter		GV-PA301 is a Gigabit Power over Ethernet (PoE) adapter.
GV-POE Switch	GV-POE Switch is designed to provide power along with network connection for IP devices. GV-POE Switch is available in various models with different numbers and types of ports.		
Power Adapter	Contact our sales representatives for the countries and areas supported.		

Mounting Type

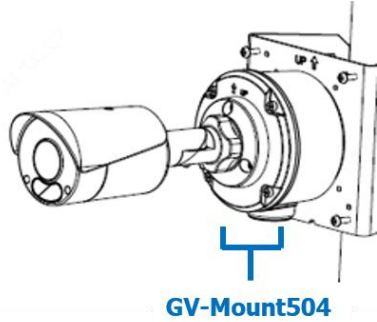Wall Bracket Mount GV-Mount504	Pole Mount GV-Mount504 + GV-Mount440 / 440-1
	
Convex / Concave Corner Mount GV-Mount504 + GV-Mount300-2 / 310-2	Power Box Mount GV-Mount924
