

GV-SD4825-IR AI 4MP 25x Zoom H.265 Super Low Lux WDR Pro Outdoor IR IP

Speed Dome (For Vietnam Market)



- AI deep learning: AI Perimeter Protection & Classification (Human, Vehicle)
- 1/2.8" progressive scan CMOS sensor
- Min. illumination at 0.003 lux
- Triple streams from H.265, H.264 or MJPEG
- Up to 30 fps at 2688 x 1520
- Motorized varifocal lens for remote focus / zoom adjustments
- 25x optical zoom and unlimited digital zoom
- Intelligent IR
- IR distance up to 150 m (492.1 ft)
- Day and night function (with removable IR-cut filter)
- Two sensor inputs and one alarm output
- Wide Dynamic Range Pro (WDR Pro)
- Ingress protection (IP67)
- Vandal resistance (IK10 for metal casing)
- Wide temperature tolerance -40°C ~ 70°C (-40°F ~ 158°F)
- Support for TV-out
- Two-way audio capable
- Built-in microSD card slot (SD / SDHC / SDXC / UHS-I, Class 10) for local storage
- DC 12V, PoE+ (IEEE 802.3at)
- Pan 360° endlessly
- Tilt from -15° to 90°
- Pan and tilt speed of up to 240°/sec and 200°/sec, respectively
- PTZ movement (Preset, Auto Pan and Patrol)
- PTZ patrol by schedule
- AI analytics (Cross Line, Intrusion, Auto Tracking, Enter Area, Leave Area, Face Detection, People Flow Counting, Crowd Density Monitoring)
- Auto focus
- 3D noise reduction
- Motion detection
- Privacy mask
- ONVIF (Profile G, S, T, M) conformant


Introduction

GV-SD4825-IR is an outdoor network PTZ camera that offers 25x optical zoom and unlimited digital zoom, capable of showing smooth live view with great details. This camera can simultaneously deliver three video streams in resolutions up to 2688 x 1520 at 30 fps. In low-light environments, night vision is enhanced with its high-power LEDs, which allow up to 150 m (492.1 ft) effective IR distance. The camera can process scenes with contrasting intensity of lights and produce a clear image using the built-in WDR Pro. The camera supports H.265 video codec to achieve a better compression ratio while maintaining high-quality pictures at reduced network bandwidths. It also adheres to IP67 and IK10 standards.

Empowered by deep learning algorithms, its AI technology distinguishes humans and vehicles from other moving objects. GV-SD4825-IR supports AI perimeter protection, people flow counting, auto tracking, motion detection, audio detection, and more.


Deep Learning Function

Face Detection

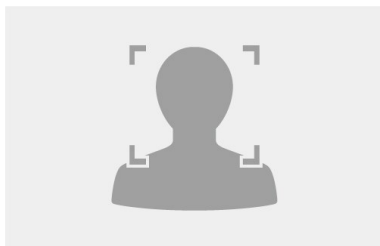


AI Perimeter Protection


(Intrusion, Crossing Line
Entering Area, Leaving Area)

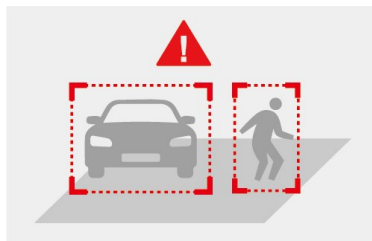

People Flow Counting

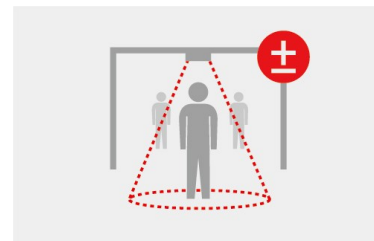

Dimensions

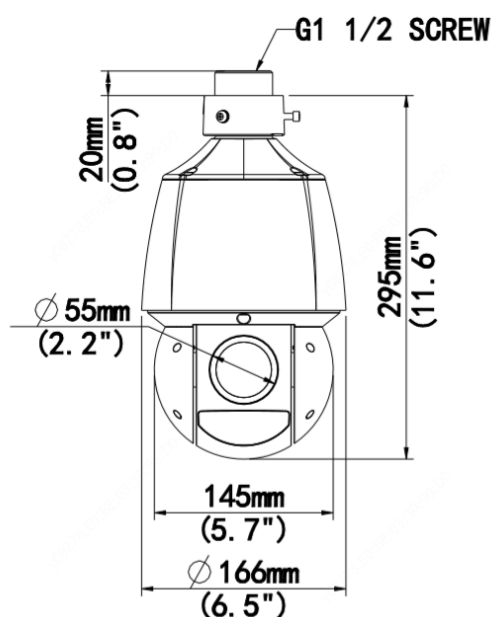

Specifications

Camera		
Image Sensor		1/2.8" progressive scan CMOS
Optical Zoom		25x
Minimum Illumination	Color	0.003 Lux (F1.5, AGC ON)
	IR ON	0 Lux
Electronic Shutter		Auto / Manual (1 ~ 1/100000 sec)
White Balance		Auto / Manual
Iris control		Auto / Manual
AGC control		Auto / Manual
S/N Ratio		56 dB
WDR		WDR Pro
Dynamic Range		Up to 120 dB
Optical Lens		
Megapixel		4 MP
Day / Night		Yes (with removable IR-cut filter)
Focal Length		4.8 ~ 120 mm
Lens Type		Motorized varifocal lens
Maximum Aperture		F1.5
FOV	Horizontal	52.20° ~ 2.74°
	Vertical	30.81° ~ 1.54°
	Diagonal	64.20° ~ 3.23°

Operation	Focus	Auto / Manual			
	Zoom	25x			
	Iris	Auto / Manual			
IR LED Quantity		4 IR LEDs			
Max. IR Distance		150 m (492.1 ft)			
DORI		Detect	Observe	Recognize	Identify
Lens	4.8 mm	119.3 m (391.2 ft)	47.7 m (156.5 ft)	23.9 m (78.2 ft)	11.9 m (39.1 ft)
	120 mm	2475.0 m (8120.1 ft)	990.0 m (3248.0 ft)	495.0 m (1624.0 ft)	247.5 m (812.0 ft)
Video					
Video Compression		H.265, H.264, MJPEG			
Video Streaming		Triple streams from H.265, H.264 or MJPEG			
Video Resolution	Main Stream	2688 x 1520 (Default), 2560 x 1440, 1920 x 1080, 1280 x 720, 720 x 576, 640 x 360.			
	Sub Stream	1920 x 1080, 1280 x 720, 720 x 576, 640 x 480, 640 x 360 (Default)			
	Third Stream (Closed by Default)	720 x 576, 704 x 288, 640 x 360, 352 x 288			
Frame Rate		30 fps at 2688 x 1520, 30 fps at 2560 x 1440, 30 fps at 1920 x 1080 (60 / 50 Hz) * The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).			
Video Analytics		Motion Detection, Tampering Alarm, Audio Detection *Tampering alarm and audio detection are only accessible through the camera's Web interface, which can be used to trigger alerts such as e-mail and FTP			
Image Setting		Brightness, Contrast, Saturation, Sharpness, Flicker-less, Image Orientation (Flip, Mirror, 0°, 90°, 180°, 270° - including Corridor format)			
Audio					
Audio Compression		G.711			
Audio Support		Two-way audio (external microphone and speaker required)			
Deep Learning Function					
AI Analytics		- <u>Perimeter Protection</u> (Human & Vehicle classification): Cross Line, Enter Area, Leave Area, Intrusion - <u>Face Detection</u>, <u>People Flow Counting</u>, <u>Crowd Density Monitoring</u>, <u>Auto Tracking</u> *All Perimeter Protection rules can be enabled together. However, due to hardware resource limitations, only one AI function can be enabled at a time: Perimeter Protection, Face Detection, People Flow Counting, Crowd Density Monitoring, or Auto Tracking.			
Network					
Interface		10/100 Ethernet			
Protocol		802.1X authentication (EAP-TLS, EAP-MD5), ARP, DHCP, DDNS, DNS, DynDNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, NTP, ONVIF (Profile G, S, T, M), PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP, UDP, UPnP			
Mechanical					
Connectors	Power	DC Jack (DC 12V 2A), PoE+ (IEEE 802.3at)			
	Ethernet	10/100 Base-TX, RJ-45 connector			
	Audio	1 in (Audio In Wire); 1 out (Audio Out Wire) *The Audio In port only supports microphones with power supply.			
	Local Storage	microSD card slot (SD / SDHC / SDXC), up to 512 GB			
	TV-Out	BNC connector: NTSC (720 x 576 at 30 fps), PAL (720 x 576 at 25 fps)			
	Digital I/O	I/O wires			
	RS-485	RS-485 wires (Private-KR, Pelco D, Pelco P)			
Operation					
Pan Travel		360° endless			
Tilt Travel		-15° ~ 90°			
Manual Speed	Pan	0.1° ~ 200°/s			
	Tilt	0.1° ~ 120°/s			
Preset Speed	Pan	240°/s			
	Tilt	200°/s			
Presets	Max. Number	255			
	Accuracy	0.3°			

Patrol	Max. Number	16
	Max. Actions Allowed	32
OSD		8
Privacy Mask		24
Proportional Pan & Tilt		Auto (Pan and tilt speed proportional to zoom ratio)
Automatic Function		Preset, Patrol (Including Auto Pan)
Mechanical Flip		Yes
Digital Slow Shutter		On / Off
Motion Detection		On / Off
Wide Dynamic Range		On / Off
Day/Night: Mechanical IR Cut Filter		On / Off
Image Rotation		Normal, Flip Vertical, Flip Horizontal, 180°, 90° Clockwise, 90° Anti-clockwise
3D Noise Reduction		0 ~ 255
Alarm	Digital I/O	2 Inputs, dry contact, NO / NC 1 Relay Output (AC 125V 0.5A / DC 30V 1A)
	Reaction	Alarm Output, PTZ to Preset, Trigger Storage
General		
Operating Temperature		-40°C ~ 70°C (-40°F ~ 158°F)
Humidity		20% ~ 90% (non-condensing)
Dimensions		Ø166 x 295 mm (6.5" x 11.6")
Weight		3.05 kg (6.72 lb)
Power Source		DC 12V, PoE+ (IEEE 802.3at)
Power Consumption		21 W
Ingress Protection		IP67
Vandal Resistance		IK10 for metal casing
Certification		CE, FCC, RoHS, UL compliant
Web Interface		
Installation Management		Web-based configuration
Maintenance		Firmware upgrade through Web Browser or Utility
Access from Web Browser		Live View, Video Recording, Change Video Quality, Bandwidth Control, Image Snapshot, Text Overlay, Image Masking
Language		Chinese Traditional, Czech, English, French, German, Hungarian, Italian, Japanese, Polish, Portuguese, Russian, Spanish
Software Applications		
Software Supported		GV-DVR / NVR (V8.9.1 or later), GV-VMS (V17.4.3 / V18.2.1 or later), GV-Control Center (V3.8.0 / V4.0.1 or later), GV-Edge Recording Manager Windows Version (V2.0.0 or later), GV-Recording Server / Video Gateway (V2.0.0 or later), GV-Redundant / Failover Server (V1.2.0 or later), GV-Mobile Server (V1.5.1 or later), GV-AI Guard (V1.0.0 or later)
Smart Device Access		GV-Eye for iOS and Android
Live Viewing		Browser (IE, Edge, Chrome, Firefox), Mobile App


Note:

- Do not use clothes or any ordinary material to clean the camera cover since they may result in scratches.
- Mind the following when using an inserted memory card for recording:
 - Recorded data on the memory card can be damaged or lost if the data are accessed while the camera is under physical shock, power interruption, memory card detachment or when the memory card reaches the end of its lifespan. No guarantee is provided for such causes.
 - The stored data can be lost if the memory card is not accessed for a long period of time. Back up your data periodically if you seldom access the memory card.
 - Memory cards are expendable and their durability varies according to the conditions of the installed site and how they are used. Back up your data regularly and replace the memory card annually.
 - To avoid power outage, it is highly recommended to apply a battery backup (UPS).
 - For better performance, it is highly recommended that you use a microSD card of SDHC/SDXC, Class 10.
 - Replace the memory card when its read/write speed is lower than 6 MB/s or when the memory card is frequently undetected by the camera.
- Specifications are subject to change without notice.

Packing List

1. GV-SD4825-IR Speed Dome
2. Torx Wrench
3. Waterproof Rubber Set
4. M4 Hex Key
5. Waterproof Guidelines
6. Download Guide

Accessories

Model No.	Name		Details
GV-Mount104	Straight Tube Kit		Dimensions: 219 x 125 x 332 mm (8.6" x 4.9" x 13.1") Weight: 1.8 kg (3.97 lb)
GV-Mount105	Straight Tube and Junction Box Kit		Dimensions: 256 x 256 x 297 mm (10.1" x 10.1" x 11.7") Weight: 6.2 kg (13.67 lb)
GV-Mount208-3	Swan Neck Mount		Dimensions: 1043 x 519 x 256 mm (41.06" x 20.43" x 10.08") Weight: 10.6 kg (23.37 lb)
GV-Mount210	Wall Pendant Mount		Dimensions: 200 x 140 x 249 mm (7.9" x 5.5" x 9.80") Weight: 1.1 kg (2.43 lb)
GV-Mount300-1	Convex Corner Adapter Kit		Dimensions: 238.6 x 395.2 x 210 mm (9.4" x 15.5" x 8.2") Weight: 4.27 kg (9.41 lb)
GV-Mount310-1	Concave Corner Adapter Kit		Dimensions: 111.2 x 369.9 x 210 mm (4.37" x 14.5" x 8.2") Weight: 2.96 kg (6.53 lb)
GV-Mount400-1	Pole Mount Bracket Kit (Ø 4" ~ 6")		Bracket: 68.4 x 240 x 163 mm (2.69" x 9.44" x 6.41") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: Ø 4" ~ 6"
GV-Mount410-1	Pole Mount Bracket Kit (Ø 6" ~ 7.5")		Bracket: 68.4 x 240 x 163 mm (2.69" x 9.44" x 6.41") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: Ø 6" ~ 7.5"

GV-Mount501	Convex Corner Box Mount		Dimensions: 136 x 256 x 256 mm (5.4" x 10.1" x 10.1") Weight: 4.8 kg (10.6 lb)
GV-Mount702	Extension Tube		Four options are available. Dimensions: Ø 5.4" x 10" or 20 or 30 or 50 cm (Ø 2.1" x 3.9" or 7.9" or 11.8" or 19.7") Weight: 180 g or 390 g or 550 g or 800 g (0.4 lb or 0.86 lb or 1.21 lb or 1.76 lb)
GV-Mount706	Adapter Ring		With GV-Mount706, GV-SD4825-IR can be installed onto the GV-Power Boxes. See the GV-Power Box Installation Guide . Central Tube: Ø 58 x 60 mm (Ø 2.28 x 2.36 in) Weight: 0.3 kg (0.66 lb) Brass Nut: 60 mm across flats x 5 mm thick (2.36 in across flats x 0.20 in thick)
GV-PA301	Gigabit PoE Adapter		GV-PA301 is a Gigabit Power over Ethernet (PoE) adapter.
GV-POE Switch	GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.		
Power Adapter	Contact our sales representatives for the countries and areas supported.		

Mounting Type

Straight Tube Mount			
GV-Mount104 	GV-Mount104 + GV-Mount702 	GV-Mount105 	GV-Mount105 + GV-Mount702 

Swan Neck Mount GV-Mount208-3  GV-Mount208-3	Wall Pendant Mount GV-Mount210  GV-Mount210	Convex Corner Mount GV-Mount210 + GV-Mount300-1  GV-Mount300-1 GV-Mount210	Concave Corner Mount GV-Mount210 + GV-Mount310-1  GV-Mount310-1 GV-Mount210
Pole Mount GV-Mount210 + GV-Mount400-1  GV-Mount210 GV-Mount400-1 or GV-Mount410-1 GV-Mount210 + GV-Mount410-1		Pole Box Mount GV-Mount210 + GV-Mount501 + GV-Mount400-1  GV-Mount210 GV-Mount501 GV-Mount400-1 or GV-Mount410-1 GV-Mount210 + GV-Mount501 + GV-Mount400-1	